




U Type Wiring Duct



- Material: Transparent PVC
- Application: Peer off the adhesive tape and stick to clean, oil-free surface. Snap wire into the duct with fingertip pressure.




Part No.	Suitable	Length
TD-1	6.5mm	2M

Close Slot Wiring Ducts



- Close slot design facilitate easy installation or removal of cover.
- Cut optionally wherever wire insertion/extension is necessary.


Part No.	Size WxH	Wires to be Contained	Length
WDC-2530-8	25x 30	15 ~ 25 pcs	2M
WDC-2560-8	25x 60	40 ~ 45 pcs	
WDC-4040-8	40x 40	60 ~ 70 pcs	
WDC-4060-8	40x 60	100 ~ 115 pcs	
WDC-4080-8	40x 80	120 ~ 135 pcs	
WDC-5050-8	50x 50	80 ~ 90 pcs	
WDC-6060-8	60x 60	120 ~ 135 pcs	
WDC-6080-8	60x 80	180 ~ 210 pcs	
WDC-8080-8	80x 80	240 ~ 290 pcs	
WDC-100100-8	100x 100	300 ~ 400 pcs	

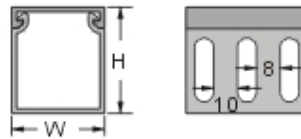

Open Slot Wiring Ducts




- Material : High impact. Self-extinguishing, warp-proof PVC..
- Color : Grey.
- Maximum service temperature : 85°C.
- Test to UL file E97527 up to 50°C.
- These devices are for routing of wires within devices in factory installations where the suitability of use will be determined by UL during the end use investigation.
- Features parallel holes on both sidewalls to facilitate cutting in wire application.

			
Part No.	Size WxH	Wires to be Contained	Length
BD-2525	25 x 25	10~25 pcs	2M
BD-3340	33 x 40	40~45 pcs	
BD-3360	33 x 60	60~70 pcs	
BD-4040	40 x 40	50~60 pcs	
BD-4860	48 x 60	110~120 pcs	
BD-6060	60 x 60	120~135 pcs	

Open Slot Wiring Ducts



- Material: High impact. Self-extinguishing, warp-proof PVC.
 - Color: Grey.
- ※ 4.5mm SLOT with score line.

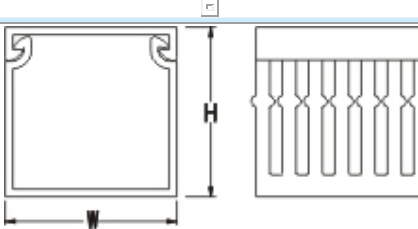			
Part No.	Size WxH	Wires to be Contained	Length
GD-3060	30x 60	30~50 pcs	2M
GD-4060	40x 60	100~115 pcs	
GD-6060	60x 60	110~120 pcs	
GD-8060	80x 60	180~210 pcs	
GD-10060	100x 60	240~290 pcs	
GD-12060	120x 60	240~290 pcs	
GD-10080	100x 80	260~350 pcs	

Part No.	Size WxH	Wires to be Contained	Length
GD-3080	30x 80	110 ~ 115 pcs	2M
GD-4080	40x 80	120 ~ 135 pcs	
GD-6080	60x 80	180 ~ 210 pcs	
GD-8080	80x 80	240 ~ 290 pcs	
GD-12080	120x 80	300 ~ 400 pcs	

Solid Trunking



- No soil design, for external wiring or where wire extraction is not necessary.
- Material: High impact, self-extinguishing, warp-proof PVC.
- Color: Grey.
- Maximum service temperature: 85°C
- These devices are for routing of wires within devices in factory installations where the suitability of use will be determined by UL during the end use investigation.
- Features parallel holes on both sidewalls to facilitate cutting in wire application.
- Special color, size, length upon request at reasonable quantity.

Part No.	Size WxH	Wires to be Contained	Length
WD-1525-0	15 x 25	5 ~ 12 pcs	2M
WD-1616-0	16x 16	3 ~ 10 pcs	
WD-2020-0	20x 20	5 ~ 12 pcs	
WD-2210-0	22x 10	3 ~ 8 pcs	
WD-2516-0	25x 16	5 ~ 12 pcs	
WD-2525-0	25x 25	10 ~ 25 pcs	
WD-2530-0	25x 30	15 ~ 25 pcs	


WD-2540-0	25x 40	20~25 pcs
WD-2545-0	25x 45	20~25 pcs
WD-2550-0	25x 50	20~30 pcs
WD-2560-0	25x 60	40~45 pcs
WD-2565-0	25x 65	40~45 pcs
WD-2575-0	25x 75	50~55 pcs
WD-2580-0	25x 80	60~75 pcs
WD-3015-0	30x 15	10~25 pcs
WD-3030-0	30x 30	20~40 pcs
WD-3333-0	33x 33	25~45 pcs
WD-3340-0	33x 40	40~45 pcs
WD-3345-0	33x 45	10~55 pcs
WD-3365-0	33x 65	60~75 pcs
WD-33100-0	33x 100	180~200 pcs
WD-3775-0	37x 75	110~115 pcs
WD-37100-0	37x 100	180~200 pcs
WD-3816-0	38x 16	12~30 pcs
WD-3825-0	38x 25	20~40 pcs
WD-3838-0	38x 38	45~50 pcs
WD-3850-0	38x 50	20~35 pcs
WD-4020-0	40x 20	20~40 pcs
WD-4040-0	40x 40	60~70 pcs
WD-4060-0	40x 60	100~115 pcs
WD-4080-0	40x 80	120~135 pcs
WD-40100-0	40x 100	130~175 pcs
WD-4545-0	45x 45	60~70 pcs
WD-4565-0	45x 65	110~120 pcs
WD-48100-0	48x 100	215~250 pcs
WD-5025-0	50x 25	25~45 pcs
WD-5050-0	50x 50	80~90 pcs
WD-5075-0	50x 75	180~200 pcs
WD-50100-0	50x 100	210~260 pcs
WD-55100-0	55x 100	220~260 pcs
WD-6040-0	60x 40	100~115 pcs
WD-6060-0	60x 60	120~135 pcs
WD-6080-0	60x 80	180~210 pcs
WD-60100-0	60x 100	240~290 pcs
WD-6545-0	65x 45	110~120 pcs
WD-6565-0	65x 65	180~200 pcs
WD-70100-0	70x 100	250~300 pcs
WD-7264-0	72x 64	200~220 pcs

WD-7540-0	75x 40	120~135 pcs
WD-7550-0	75x 50	180~200 pcs
WD-7575-0	75x 75	200~250 pcs
WD-75100-0	75x 100	240~300 pcs
WD-8040-0	80x 40	120~135 pcs
WD-8050-0	80x 50	180~200 pcs
WD-8060-0	80x 60	180~210 pcs
WD-8080-0	80x 80	240~290 pcs
WD-80100-0	80x 100	260~350 pcs
WD-10030-0	100x 30	130~160 pcs
WD-10033-0	100x 33	180~200 pcs
WD-10040-0	100x 40	180~200 pcs
WD-10050-0	100x 50	200~250 pcs
WD-10060-0	100x 60	240~290 pcs
WD-10075-0	100x 75	260~320 pcs
WD-10080-0	100x 80	260~350 pcs
WD-100100-0	100x 100	300~400 pcs
WD-12060-0	120x 60	240~290 pcs
WD-12065-0	120x 65	260~350 pcs
WD-12075-0	120x 75	280~380 pcs
WD-12080-0	120x 80	300~400 pcs
WD-12575-0	120x 75	280~380 pcs
WD-15060-0	150x 60	310~480 pcs
WD-15075-0	150x 75	335~500 pcs
WD-150100-0	150x 100	450~600 pcs
WD-200100-0	200x 100	600~800 pcs
WD-200150-0	200x 150	1040~1200 pcs
WD-200200-0	200x 200	1200~1600 pcs
WD-300100-0	300x 100	1010~1400 pcs
WD-400100-0	400x 100	1380~1600 pcs
WD-600100-0	600x 100	2080~2400 pcs


Round Floor Ducting



- Material: High impact, rigid, Self-extinguish PVC.
- Maximum service Temperature: 85°C.
- Color: Grey. (White, Milk, Brown, Dark Brown available)
- Backed with high quality double sided tape for permanent stick. Good for floor wiring to facilitate trolley pass and to avoid trip.



Part No.	W	W1	H	H1	Color	Length
RD-20	20.0	8.0	6.0	4.0	Grey	1M
RD-20BN					Brown	
RD-20MW					Milk	
RD-20LX					Light grained	
RD-20DX					Dark grained	
RD-30	30.0	11.0	8.0	6.0	Grey	
RD-30BN					Brown	
RD-30MW					Milk	
RD-30LX					Light grained	
RD-30DX					Dark grained	
RD-40	40.0	16.0	9.5	7.0	Grey	
RD-40BN					Brown	
RD-40MW					Milk	
RD-40LX					Light grained	
RD-40DX					Dark grained	
RD-50	50.0	20.0	11.0	8.0	Grey	
RD-50BN					Brown	
RD-50MW					Milk	
RD-50LX					Light grained	
RD-50DX					Dark grained	
RD-60	60.0	30.0	13.0	9.0	Grey	
RD-60BN					Brown	
RD-60MW					Milk	
RD-60LX					Light grained	
RD-60DX					Dark grained	



Part No.	W	W1	H	H1	Color	Length
RD-70	70.0	40.0	15.0	10.0	Grey	1M
RD-70BN					Brown	
RD-70MW					Milk	
RD-70LX					Light grained	
RD-70DX					Dark grained	
RD-90	90.0	45.0	19.0	15.0	Grey	
RD-90BN					Brown	
RD-90MW					Milk	
RD-90LX					Light grained	
RD-90DX					Dark grained	
RD-120	120.0	70.0	25.0	21.0	Grey	
RD-120BN					Brown	
RD-120MW					Milk	
RD-120LX					Light grained	
RD-120DX					Dark grained	