



สายไฟสำหรับโรงงานอุตสาหกรรมและออฟฟิศบิวติง


Flexible Colour Code Control Cable, LiYY



See page No. 3, 4



Flexible Twisted Control Cable, LiYY



See page No. 5, 6

Flexible Foil Shielded Instrument Cable

RD-Y(St)Y : See page No. 20, 21



J-Y(St)Y : See page No. 22, 23



Flexible Silicone Cable, 180°C

See page No. 24, 25



See page No. 33, 34, 35



See page No. 28, 29, 35, 36



See page No. 30, 31, 37, 38

Flexible Single Core Wiring Cable,
H05V-K/H07V-K



See page No. 1, 2

Flexible Rubber-Sheathed Cable



Earth-Fault-Proof Cable, NSGAFOU

See page No. 44, 45



Welding Cable, HO1N2-D

See page No. 46, 47



H07RN-F, See page No. 48, 49 / PUR for clean room
See page No. 59, 60




NSHTOU Drum Reeling Cable,

See page No. 50, 51

Flexible Round Cable with 2 Sling,

See page No. 54



Flexible Flat Cable, H07VVH6-F, See page No. 39, 40



PVC Coated Copper Tube/Heat Tracing Cable,

See page No. 74, 75



Extraflex, Drag Chain See page No. 52, 53









Armoured Instrument Cable, See page No. 42



Fibre Optic Cable Single/Multimode,




Thermocouple Extension Wire
ANSI MC96.1, TEFLON 204 C/250°C



See page No. 68

Fire Resistant Cable BS6387 CWZ

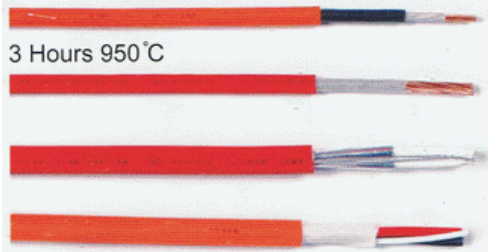

3 Hours 950 °C

See page No. 70, 71, 72

Double Screen Power Cable : 2YSL (St) YCY-J 0.6/1kV Motor Servo, Inverter, variable frequency drive



See page No. 57, 58




Screen Power/Control Cable : OPVC-JZ-CY/YSLY-JZ-CY

See page No. 10, 11, 12




Thermocouple Extension Wire, ANSI MC 96.1, 105 °C

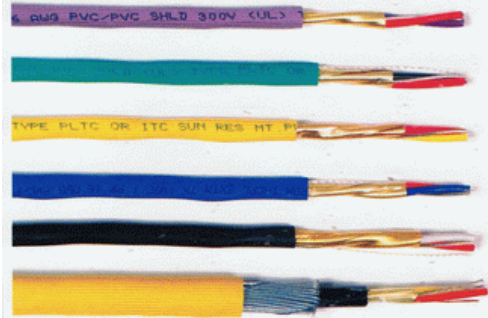

See page No. 65, 66

Low Capacitance, High Speed Cable RS485, RS422




Profibus Cable 120/150 Ω Indoor See page No. 55, 56



Profibus Cable 150 Ω Outdoor




High Speed Instrument Cable Indoor See page No. 41, 42



Intrinsically Safe Area Cable See page No. 42













Thermocouple Compensating Cable, 105 °C, 180 °C & 250 °C

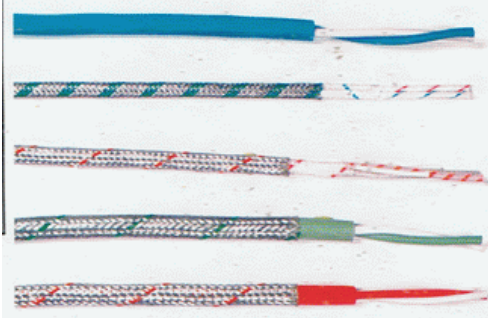


See page No. 61, 62, 63, 64, 67

High Temperature Lead Wire, 538 °C








See page No. 69



Flexible Power/Control Cable, OPVC -JZ/YSLY-JZ See page No. 7, 8, 9

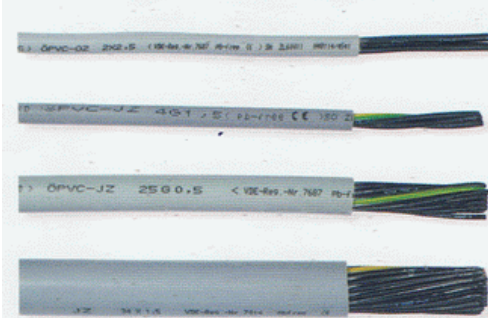

Flexible Multicores Shielded, Instrument cable, LIYCY See page No. 15, 16, 17



Flexible Twisted Pair Shielded, Instrument cable, LIYCY See page No. 18, 19

